

FTCAP GmbH  
 Carl-Benz Str. 1  
 25813 Husum / Germany  
 Tel. +49 (0) 4841 8957 0  
 Fax. +49 (0) 4841 8957 45  
 Email info@ftcap.de

**FTCAP GmbH**  
**Data sheet**




Customer : Wüsten Elektronik  
 Drawing No. : 1032357-53150  
 created: hs 02/06/2018 08:57:00

Seite 1 / 1

**Typ : SZ32055025054**

**RoHS Compliant**

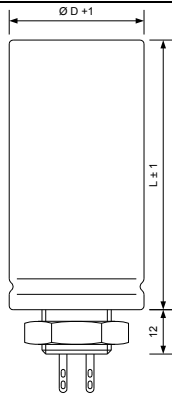


Ø D : 25 mm  
 L : 54 mm

mounting : M18 x 1,5

Terminals : solder lugs

Pin Configuration



-	Ground	2	Cap 2
1	Cap 1	3	Cap 3

**Electrical Parameters**

Rated Capacitance ( C <sub>R</sub> ) @ 100 Hz / 20 °C	<b>32 + 32</b> μF	Cap 3: n.c.
Tolerance	<b>-10 +30</b> %	
Rated Voltage ( U <sub>R</sub> )	<b>550</b> V	
Surge Voltage ( U <sub>S</sub> ) max. 5 x 1 min / h	<b>600</b> V	
Reverse Voltage ( U <sub>U</sub> ) max. 1 s	<b>2</b> V	
Leakage Current ( I <sub>L</sub> ) @ U <sub>R</sub> / 5 min / 20 °C	<b>104</b> μA	
ESR typ. @ 100 Hz / 20°C	<b>3000</b> mΩ	
Tan δ typ. @ 100 Hz / 20°C	<b>6</b> %	
Z max. @ 10 kHz / 20°C	<b>2400</b> mΩ	
ESL typ.	<b>60</b> nH	
Rated Ripple Current ( I <sub>R</sub> ) @ 100 Hz / 85 °C	<b>0,3</b> A	
Useful life @ I <sub>R</sub> , U <sub>R</sub> , 85 °C	<b>2500</b> h	
IEC Climatic category / Standards	<b>40/085/56</b>	<b>IEC 60384-4</b>
Applications	valve amplifier, replacement	
Your article No. / Project		